

YEAR
5
WARRANTY

Certified Product
**Australian
Standard
AS/NZS
2293**

K2



IK
10

IP
65




LIGHTING NETWORK
CONTROL SYSTEM



MONITORING
SAFETY MANAGER



AUTOMATIC
SELF TEST




INTELLIGENT
BATTERY SYSTEM



SQUARE
DISTRIBUTION

ANTI-PANIC



ESCAPE ROUTE
ELONGATED
DISTRIBUTION

ETAP 
EXCELLENT LIGHTING, SAVING ENERGY


Distributed By:

EURO LIGHTING

+64 (09) 415 1377
info@eurolighting.co.nz
www.eurolighting.co.nz

ESCAPE ROUTE OPTICS – 1 lux

 ESCAPE ROUTE K21* Illuminance 1 lux				
CLOSEST CLASSIFICATION C0:D800 C90:A40				
H (m)	A (m)	B (m)	C (m)	D (m)
2.1	8.0	17.3	2.4	4.9
2.4	8.6	18.7	2.6	5.2
2.7	9.1	20.1	2.7	5.4
3.0	9.6	21.4	2.9	5.6
3.3	10.1	22.6	3.0	5.9
3.6	10.5	23.7	3.1	6.2
4.0	11.0	25.1	3.3	6.5
4.5	11.3	26.8	3.5	7.5
5.0	11.0	28.2	3.5	8.0
6.0	9.9	30.1	3.3	8.7
7.0	8.7	29.7	2.6	8.9
8.0	0.5	22.6	0.5	6.5
9.0	0.5	16.5	0.5	5.0
10.0	6.0	11.7	0.5	3.4
15.0	-	-	-	-
20.0	-	-	-	-

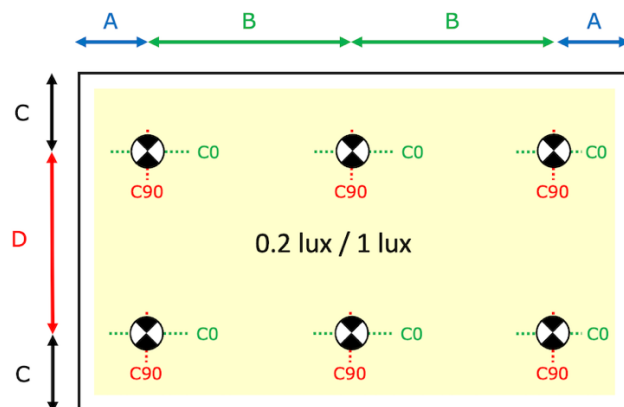

ANTI - PANIC OPTICS – 1 lux / 0.2 lux

 ANTI-PANIC K22* Illuminance 1 lux				
CLOSEST CLASSIFICATION C0:E63 C90:E63				
H (m)	A (m)	B (m)	C (m)	D (m)
2.1	3.6	9.8	4.0	9.8
2.4	3.9	10.6	4.4	10.6
2.7	4.2	11.4	4.6	11.4
3.0	4.3	12.2	4.7	12.2
3.3	4.3	12.9	4.8	12.9
3.6	4.4	13.5	4.9	13.5
4.0	4.1	14.3	4.6	14.3
4.5	1.6	15.2	4.2	15.2
5.0	1.4	15.4	3.0	15.4
6.0	2.9	13.7	0.5	13.7
7.0	0.5	13.0	0.5	13.0
8.0	0.5	11.8	0.5	11.8
9.0	0.5	9.9	0.5	9.9
10.0	0.5	7.7	0.6	7.7
15.0	-	-	-	-
20.0	-	-	-	-

 ANTI-PANIC K22* Illuminance 0.2 lux				
CLOSEST CLASSIFICATION C0:B500 C90:B500				
H (m)	A (m)	B (m)	C (m)	D (m)
2.1	4.6	13.4	4.5	13.4
2.4	4.8	14.6	4.9	14.6
2.7	5.3	15.6	5.6	15.6
3.0	5.6	16.7	6.0	16.7
3.3	6.0	17.7	6.5	17.7
3.6	6.4	18.6	7.0	18.6
4.0	6.7	20.0	7.3	20.0
4.5	7.3	21.4	8.1	21.4
5.0	7.6	23.0	8.5	23.0
6.0	8.5	25.6	9.5	25.6
7.0	8.8	28.2	10.0	28.2
8.0	8.9	30.4	10.1	30.4
9.0	8.3	32.3	9.6	32.3
10.0	3.0	34.0	7.9	34.0
15.0	0.5	29.6	0.5	29.6
20.0	0.5	22.4	0.5	22.4